


CARTRIDGE

28 Nosler - 185 grain

Version 8.0

Nosler®

UP FRONT

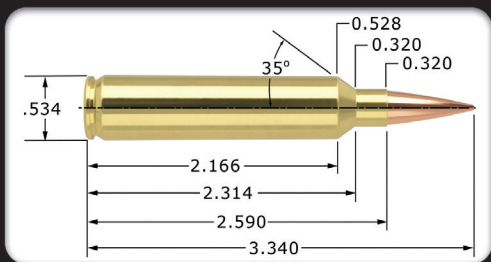

28 Nosler - 185 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

Reduced Drag Factor™	185gr. Spitzer	3.340"	0.719	0.328
----------------------	----------------	--------	-------	-------

CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	88.7	Gr. WATER	26" Pac-Nor	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7828 SSC	69.5 MAX.	2956	81%
	67.5 *	2874	78%
	65.5	2792	76%
IMR 7977	73.5 * MAX.	2966	85%
	71.5	2888	83%
	69.5	2810	81%
IMR 8133	78.5 MAX.	3004	98%
	76.5 *	2908	95%
	74.5	2812	93%
H1000	75.0 * MAX.	3004	89%
	73.0	2948	87%
	71.0	2892	85%
RL26	74.0 MAX.	3039	85%
	72.0	2957	83%
	70.0 *	2874	81%
Retumbo Most Accurate Powder Tested	78.0 * MAX.	3049	93%
	76.0	2974	90%
	74.0	2899	88%
RL25	78.0 * MAX.	3065	96%
	76.0	2984	93%
	74.0	2902	91%
Norma 217	78.5 MAX.	3067	99%
	76.5	2981	97%
	74.5 *	2895	94%
RL33	85.0 * MAX.	3087	98%
	83.0	3003	95%
	81.0	2919	93%
LRT	89.0 MAX.	3120	100%
	87.0 *	3051	97%
	85.0	2981	95%
US869	89.0 MAX.	3152	** 109%
	87.0 *	3065	** 107%
	85.0	2977	** 104%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load