


CARTRIDGE

280 Ackley Improved - 175 grain

Version 8.3

Nosler

UP FRONT

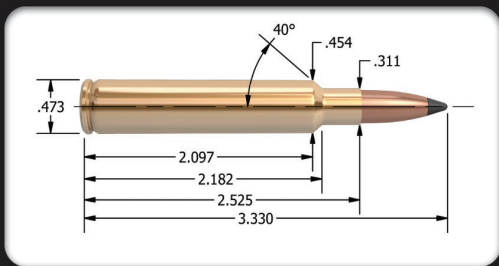

280 Ackley Improved - 175 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.330"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	175gr. Spitzer	3.330"	0.648	0.310
Partition®	175gr. Spitzer	3.330"	0.519	0.310

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	64.9 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N160	50.5 MAX.	2590	86%
	48.5	2524	83%
	46.5 *	2458	80%
Viht N165	56.0 MAX.	2703	96%
	54.0	2614	92%
	52.0 *	2525	89%
IMR 4350	51.0 * MAX.	2719	83%
	49.0	2622	80%
	47.0	2538	77%
H4831	55.5 MAX.	2729	89%
	53.5	2626	86%
	51.5 *	2523	83%
IMR 4831	54.0 MAX.	2750	89%
	52.0 *	2656	86%
	50.0	2561	82%
RL23	55.5 MAX.	2764	95%
	53.5	2680	92%
	51.5 *	2596	88%
IMR 7828 SSC Most Accurate Powder Tested	58.0 MAX.	2772	92%
	56.0 *	2677	89%
	54.0	2582	86%
RL22	55.5 MAX.	2789	93%
	53.5 *	2700	90%
	51.5	2610	86%
Norma MRP	57.5 * MAX.	2798	97%
	55.5	2698	94%
	53.5	2598	91%
H1000	60.5 MAX.	2816	99%
	58.5 *	2739	95%
	56.5	2661	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load