


CARTRIDGE

300 Winchester Short Magnum - 210 grain

Version 8.3

Nosler

UP FRONT

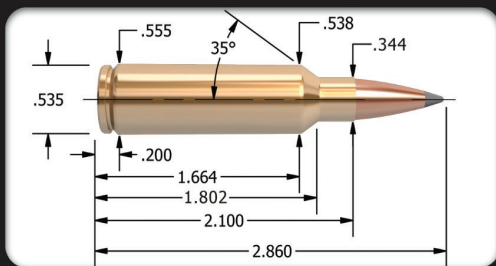

300 WSM - 210 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.860"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	210gr. Spitzer	2.860"	0.661	0.316
Reduced Drag Factor™	210gr. HPBT	2.860"	0.707	0.316

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	66.1 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N160	60.0 MAX.	2688	** 101%
	58.0 *	2612	97%
	56.0	2536	94%
RL17	59.0 * MAX.	2782	92%
	57.0	2707	89%
	55.0	2632	86%
H4831	65.0 * MAX.	2792	** 102%
	63.0	2715	99%
	61.0	2638	96%
IMR 4350	61.0 MAX.	2821	98%
	59.0 *	2722	94%
	57.0	2623	91%
RL19	65.0 MAX.	2824	** 107%
	63.0 *	2728	** 104%
	61.0	2651	100%
Hunter	65.0 MAX.	2825	** 104%
	63.0 *	2722	100%
	61.0	2619	97%
H414 Most Accurate Powder Tested	62.0 MAX.	2827	98%
	60.0	2719	95%
	58.0 *	2622	91%
Norma MRP	66.0 * MAX.	2832	** 110%
	64.0	2756	** 106%
	62.0	2680	** 103%
Hybrid 100V	61.0 MAX.	2842	98%
	59.0 *	2773	95%
	57.0	2686	92%
Viht N560	66.0 * MAX.	2852	** 111%
	64.0	2772	** 108%
	62.0	2692	** 104%
RL22	66.0 MAX.	2863	** 109%
	64.0 *	2798	** 105%
	62.0	2723	** 102%
4000-MR	65.0 * MAX.	2891	** 104%
	63.0	2813	100%
	61.0	2735	97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load