


# CARTRIDGE

264 Winchester Magnum - 123/125 grain

Version 8.0

# Nosler®

UP FRONT

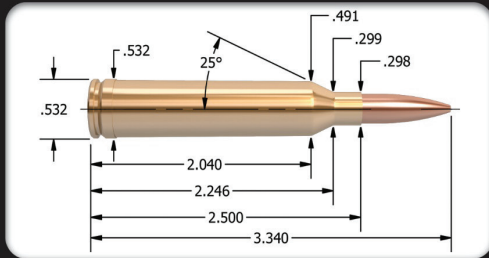

## 264 Winchester Magnum - 123/125 grain 6.5mm (.264")

**MAXIMUM S.A.A.M.I. O.A.C.L. 3.340" TESTED O.A.C.L. B.C. S.D.**

Custom Competition®	123gr. HPBT	3.220"	0.510	0.252
Partition®	125gr. Spitzer	3.220"	0.449	0.256

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	81.2 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>IMR 4350</b>	57.5 * MAX.	3097	75%	
	55.5	3022	72%	
	53.5	2947	70%	
<b>H4350</b>	55.5 MAX.	3120	72%	
	53.5 *	3030	70%	
	51.5	2960	67%	
<b>IMR 4831</b>	61.5 * MAX.	3130	81%	
	59.5	2995	78%	
	57.5	2885	75%	
<b>W760</b>	56.5 MAX.	3139	73%	
	54.5	3029	70%	
	52.5 *	2945	68%	
<b>Hunter</b>	59.0 MAX.	3158	76%	
	57.0	3090	74%	
	55.0 *	3031	71%	
<b>RL19</b>	61.0 MAX.	3222	82%	
	59.0 *	3118	79%	
	57.0	3040	76%	
<b>MAGPRO</b>	70.0 MAX.	3245	89%	
	68.0 *	3168	86%	
	66.0	3111	84%	
<b>Magnum</b>	70.0 MAX.	3246	88%	
	68.0	3183	85%	
	66.0 *	3128	83%	
<b>LRT</b>	78.5 * MAX.	3272	97%	
	76.5	3128	95%	
	74.5	2984	92%	
<b>Supreme 780</b>	67.0 * MAX.	3298	86%	
	Most Accurate	65.0	3220	84%
	Powder Tested	63.0	3120	81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested  
 \*\* = Compressed load