


CARTRIDGE

270 Weatherby Magnum - 150 grain

Version 8.3

Nosler

UP FRONT

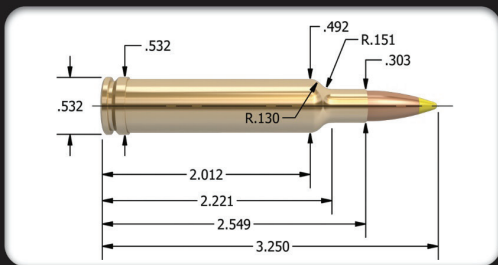

270 Weatherby Magnum - 150 grain 270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.250"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	150gr. Spitzer	3.230"	0.496	0.279
AccuBond® Long Range	150gr. Spitzer	3.220"	0.591	0.279
Ballistic Tip®	150gr. Spitzer	3.230"	0.496	0.279
CT® Ballistic Silvertip®	150gr. Spitzer	3.230"	0.496	0.279
Partition®	150gr. Spitzer	3.230"	0.465	0.279

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	79.4 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL22	66.5 MAX.	2988	[Bar]	91%
	64.5	2901	[Bar]	88%
	62.5 *	2815	[Bar]	86%
MAGPRO	70.0 MAX.	3031	[Bar]	91%
	68.0 *	2913	[Bar]	88%
	66.0	2812	[Bar]	86%
IMR 4831	67.0 * MAX.	3060	[Bar]	90%
	65.0	2950	[Bar]	87%
	63.0	2840	[Bar]	84%
IMR 4350	65.0 * MAX.	3060	[Bar]	87%
	63.0	2990	[Bar]	84%
	61.0	2920	[Bar]	81%
H4831	69.0 MAX.	3068	[Bar]	91%
	67.0	2943	[Bar]	88%
	65.0 *	2818	[Bar]	85%
Retumbo	75.0 MAX.	3091	[Bar]	99%
	73.0 *	3039	[Bar]	97%
	71.0	2965	[Bar]	94%
RL25 Most Accurate Powder Tested	72.0 * MAX.	3109	[Bar]	99%
	70.0	3040	[Bar]	96%
	68.0	2924	[Bar]	93%
Viht N560	69.5 * MAX.	3190	[Bar]	97%
	67.5	3103	[Bar]	94%
	65.5	2998	[Bar]	92%
IMR 7828	70.5 MAX.	3207	[Bar]	94%
	68.5	3118	[Bar]	92%
	66.5 *	3033	[Bar]	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load