


# CARTRIDGE

270 Winchester - 150 grain

Version 8.3

# Nosler®

UP FRONT

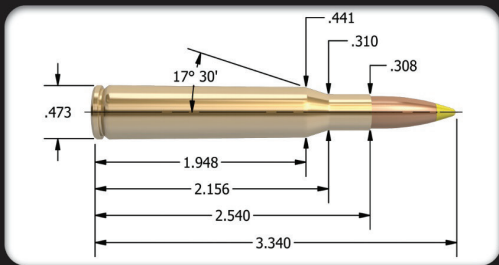

270 Winchester - 150 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	150gr. Spitzer	3.320"	0.496	0.279
AccuBond® Long Range	150gr. Spitzer	3.340"	0.591	0.279
Ballistic Tip®	150gr. Spitzer	3.320"	0.496	0.279
CT® Ballistic Silvertip®	150gr. Spitzer	3.320"	0.496	0.279
Partition®	150gr. Spitzer	3.320"	0.465	0.279

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	62.8 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4350</b> Most Accurate Powder Tested	52.0 * MAX.	2782	88%
	50.0	2657	84%
	48.0	2532	81%
<b>W760</b>	50.0 MAX.	2810	83%
	48.0	2740	80%
	46.0 *	2670	77%
<b>IMR 4320</b>	45.0 * MAX.	2818	77%
	43.0	2723	74%
	41.0	2628	70%
<b>Viht N165</b>	54.0 MAX.	2842	96%
	52.0	2752	92%
	50.0 *	2662	88%
<b>IMR 7828</b>	57.5 MAX.	2862	97%
	55.5	2737	94%
	53.5 *	2612	91%
<b>RL19</b>	55.0 MAX.	2892	95%
	53.0	2777	92%
	51.0 *	2662	88%
<b>RL22</b>	56.5 MAX.	2902	98%
	54.5	2787	94%
	52.5 *	2672	91%
<b>H4831</b>	55.0 MAX.	2905	91%
	53.0	2817	88%
	51.0 *	2728	85%
<b>MAGPRO</b>	61.5 MAX.	2913	101% **
	59.5 *	2838	98%
	57.5	2735	94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested

\*\* = Compressed load