


CARTRIDGE

28 Nosler - 150 grain

Version 8.3

Nosler

UP FRONT

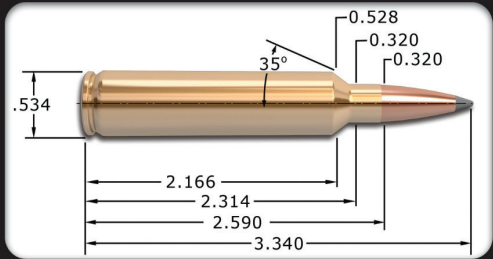

28 Nosler - 150 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	150gr. Spitzer	3.340"	0.493	0.266
AccuBond® Long Range	150gr. Spitzer	3.340"	0.546	0.266
Ballistic Tip®	150gr. Spitzer	3.340"	0.493	0.266
CT® Ballistic Silvertip®	150gr. Spitzer	3.340"	0.493	0.266
E-Tip®	150gr. Spitzer	3.300"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	150gr. Spitzer	3.340"	0.456	0.266
CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	93.8 Gr. WATER	BARREL Length/Make	26" Pac-Nor	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N165	78.0 * MAX.	3189	92%
	76.0	3126	90%
	74.0	3066	88%
IMR 7828 SSC	78.0 * MAX.	3330	86%
	76.0	3277	84%
	74.0	3227	81%
Magnum	86.0 MAX.	3332	93%
	84.0 *	3270	91%
	82.0	3208	89%
H1000	84.0 * MAX.	3350	94%
	82.0	3260	92%
	80.0	3170	89%
IMR 7977	83.0 * MAX.	3352	91%
	81.0	3237	89%
	79.0	3122	87%
RL26	82.0 MAX.	3385	95%
	80.0 *	3289	93%
	78.0	3193	90%
Retumbo	86.0 MAX.	3392	97%
	84.0 *	3288	94%
	82.0	3184	92%
US869	95.0 * MAX.	3396	** 110%
	93.0	3326	** 108%
	91.0	3256	** 105%
RL25	84.0 MAX.	3410	97%
	82.0 *	3354	95%
	80.0	3298	93%
Norma 217	88.0 MAX.	3417	** 105%
	86.0 *	3325	** 103%
	84.0	3233	** 101%
RL33 Most Accurate Powder Tested	94.0 MAX.	3425	** 102%
	92.0	3374	100%
	90.0 *	3320	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load