


# CARTRIDGE

280 Ackley Improved - 150 grain

Version 8.3

# Nosler®

UP FRONT

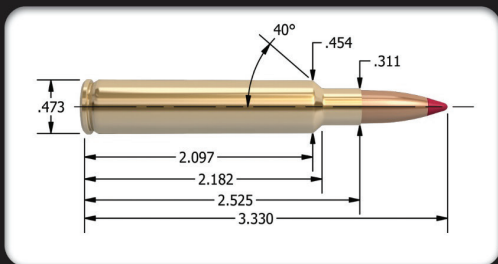

280 Ackley Improved - 150 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.330"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	150gr. Spitzer	3.330"	0.493	0.266
AccuBond® Long Range	150gr. Spitzer	3.330"	0.546	0.266
Ballistic Tip®	150gr. Spitzer	3.330"	0.493	0.266
CT® Ballistic Silvertip®	150gr. Spitzer	3.330"	0.493	0.266
E-Tip®	150gr. Spitzer	3.300"	0.498	0.266

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

Partition®	150gr. Spitzer	3.330"	0.456	0.266
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210	
CASE HOLDS:	64.8 Gr. WATER	BARREL Length/Make	26" Wiseman	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Norma MRP</b>	57.0 MAX.	2856	97%
	55.0 *	2736	93%
	53.0	2616	90%
<b>Hunter</b>	57.5 * MAX.	2928	93%
	55.5	2870	90%
	53.5	2812	87%
<b>4000-MR</b>	57.0 * MAX.	2984	93%
	55.0	2887	89%
	53.0	2790	86%
<b>H4831SC</b> Most Accurate Powder Tested	60.5 * MAX.	2994	97%
	58.5	2889	94%
	56.5	2776	91%
<b>RL17</b>	55.0 MAX.	3014	88%
	53.0	2890	85%
	51.0 *	2796	81%
<b>IMR 4350</b>	56.5 MAX.	3014	92%
	54.5 *	2912	89%
	52.5	2794	86%
<b>Viht N165</b>	63.0 * MAX.	3055	** 108%
	61.0	2956	** 105%
	59.0	2857	** 101%
<b>RL22</b>	61.5 MAX.	3095	** 103%
	59.5	2988	100%
	57.5 *	2880	96%
<b>IMR 7828</b>	63.0 MAX.	3107	** 103%
	61.0	3015	100%
	59.0 *	2923	97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested  
 \*\* = Compressed load