


CARTRIDGE

22-250 Remington A.I. - 34/35 grain

Version 8.0

Nosler®

UP FRONT

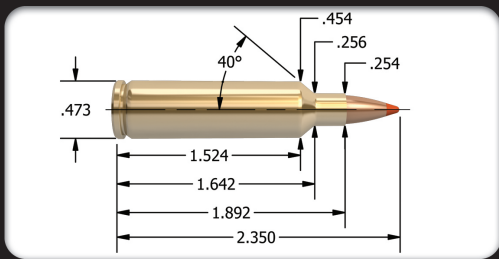

22-250 Remington A.I. - 34/35 grain

22 Cal. (.224")

MAXIMUM O.A.C.L. 2.350"

TESTED O.A.C.L.

B.C.

S.D.

Nosler®	34gr. FBHP	2.230"	0.113	0.097
Ballistic Tip® Lead Free	35gr. Spitzer	2.350"	0.201	0.100
CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2	
CASE HOLDS:	46.3 Gr. WATER	BARREL Length/Make	26" Shilen	
		BARREL Twist	1-14"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Big Game	45.0 MAX.	4285	** 102%
	43.0 *	4102	98%
	41.0	3919	93%
H380	46.5 MAX.	4328	** 106%
	44.5	4154	** 101%
	42.5 *	3980	97%
RL15	42.5 MAX.	4456	96%
	40.5 *	4288	91%
	38.5	4120	87%
Varget Most Accurate Powder Tested	42.0 MAX.	4459	98%
	40.0	4257	93%
	38.0 *	4055	89%
Viht N140	41.0 MAX.	4468	** 103%
	39.0 *	4265	98%
	37.0	4062	93%
IMR 4895	42.0 * MAX.	4556	100%
	40.0	4315	95%
	38.0	4074	90%
IMR 4064	41.0 MAX.	4570	97%
	39.0 *	4339	93%
	37.0	4108	88%
W748	43.0 * MAX.	4583	97%
	41.0	4419	92%
	39.0	4255	88%
Viht N135	40.5 MAX.	4654	** 102%
	38.5	4458	97%
	36.5 *	4262	92%
IMR 3031	39.5 MAX.	4760	96%
	37.5	4515	92%
	35.5 *	4270	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load