


CARTRIDGE

22-250 Remington A.I. (Fast Twist) 60/62 grain

Version 8.0

Nosler

UP FRONT

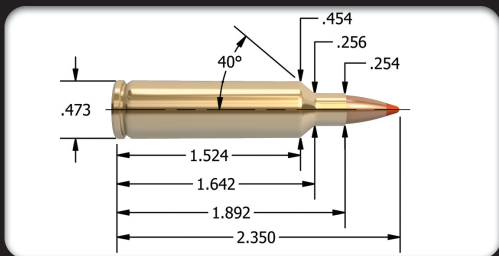

22-250 Remington A.I. 60/62 grain (Fast Twist) 22 Cal. (.224")

Maximum O.A.C.L. 2.350"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	60gr. Spitzer	2.350"	0.270	0.171
Partition®	60gr. Spitzer	2.350"	0.228	0.171
Varmageddon®	62gr. FBHP	2.350"	0.251	0.176

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	48.0 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	44.0 MAX.	3528	95%
	42.0	3356	91%
	40.0 *	3219	87%
IMR 4895 Most Accurate Powder Tested	35.5 * MAX.	3552	81%
	33.5	3381	77%
	31.5	3214	72%
IMR 4350	41.0 MAX.	3564	90%
	39.0 *	3394	86%
	37.0	3257	82%
IMR 4064	35.5 MAX.	3572	81%
	33.5 *	3394	77%
	31.5	3264	72%
Big Game	39.0 MAX.	3578	86%
	37.0	3364	81%
	35.0 *	3185	77%
IMR 4831	42.0 MAX.	3596	93%
	40.0 *	3428	89%
	38.0	3256	84%
Viht N540	36.5 * MAX.	3622	84%
	34.5	3496	80%
	32.5	3375	75%
Varget	36.5 * MAX.	3626	82%
	34.5	3492	78%
	32.5	3365	73%
RL15	36.5 MAX.	3638	79%
	34.5 *	3465	75%
	32.5	3299	71%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load