


CARTRIDGE

22 Nosler - 85 grain

Version 8.2

Nosler

UP FRONT

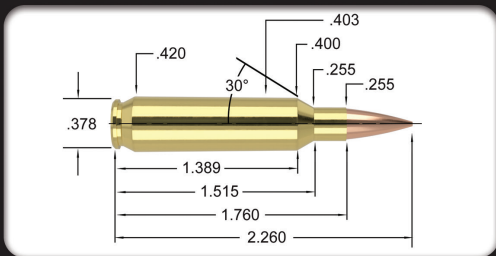

22 Nosler - 85 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

RDF®	85gr. HPBT	2.260"	0.498	0.242
------	------------	--------	-------	-------

CASE TYPE:	Nosler	PRIMER TYPE	WSR
------------	--------	-------------	-----

CASE HOLDS:	30.7	Gr. WATER	BARREL Length/Make	24" H-S Prec.
-------------	------	-----------	--------------------	---------------

		BARREL Twist	1-8"
--	--	--------------	------

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H335	26.0	MAX.	2722	86%
	25.0	*	2604	83%
	24.0		2503	79%
Norma 202	26.0	MAX.	2727	96%
	25.0	*	2615	93%
	24.0		2503	89%
Varget	26.5	MAX.	2730	93%
	25.5	*	2638	90%
	24.5		2546	86%
A-2520 Most Accurate Powder Tested	27.0	MAX.	2755	91%
	26.0	*	2618	87%
	25.0		2481	84%
W748	27.5	MAX.	2802	93%
	26.5		2701	90%
	25.5	*	2608	87%
W760	30.0	MAX.	2814	** 102%
	29.0	*	2717	99%
	28.0		2620	96%
RL15	27.5	MAX.	2826	93%
	26.5		2702	90%
	25.5	*	2622	87%
H414	29.5	MAX.	2834	100%
	28.5		2724	97%
	27.5	*	2616	93%
H380	30.0	* MAX.	2853	** 103%
	29.0		2720	99%
	28.0		2559	96%
CFE 223	28.5	* MAX.	2853	94%
	27.5		2727	90%
	26.5		2601	87%
H4350	30.5	* MAX.	2880	** 105%
	29.5		2796	** 102%
	28.5		2712	98%
RL16	30.5	* MAX.	2889	** 103%
	29.5		2804	99%
	28.5		2719	96%
RL17	31.0	MAX.	2913	** 105%
	30.0		2821	** 101%
	29.0	*	2768	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested
 ** = Compressed load