


CARTRIDGE

270 Weatherby Magnum - 140 grain

Version 8.0

Nosler®

UP FRONT

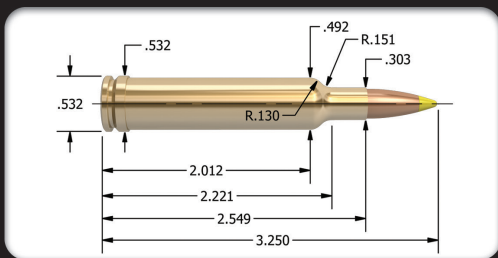

270 Weatherby Magnum - 140 grain 270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.250"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	140gr. Spitzer	3.230"	0.496	0.261
Ballistic Tip®	140gr. Spitzer	3.230"	0.456	0.261
Partition®	140gr. Spitzer	3.230"	0.432	0.261

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	79.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831	71.0 * MAX.	3080	94%
	69.0	2980	91%
	67.0	2880	88%
RL22	68.5 * MAX.	3116	94%
	66.5	3039	91%
	64.5	2961	89%
IMR 4350	66.5 * MAX.	3138	89%
	64.5	3043	86%
	62.5	2948	84%
IMR 4831	68.5 MAX.	3155	92%
	66.5	3045	90%
	64.5 *	2935	87%
Magnum	77.0 MAX.	3160	99%
	75.0	3089	96%
	73.0 *	2981	94%
MAGPRO	74.0 * MAX.	3162	97%
	72.0	3044	94%
	70.0	2996	91%
RL25	73.0 * MAX.	3193	100%
	71.0	3143	98%
	69.0	3021	95%
IMR 7828	71.0 MAX.	3260	96%
	69.0	3155	93%
	67.0 *	3053	90%
Viht N560	70.5 * MAX.	3293	99%
	Most Accurate Powder Tested 68.5	3170	96%
	66.5	3093	94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load