


CARTRIDGE

44 Special - 240 grain

Version 8.0

Nosler[®]

UP FRONT

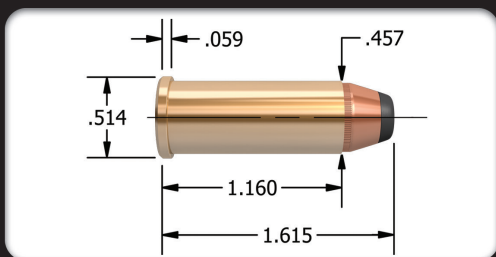

44 Special - 240 grain

44 Cal. (.429")

MAXIMUM S.A.A.M.I. O.A.C.L. 1.615"

TESTED O.A.C.L.

B.C.

S.D.

Sporting Handgun™ Revolver	240gr. JHP	1.455"	0.173	0.186
Sporting Handgun™ Revolver	240gr. JSP	1.455"	0.177	0.186

CASE TYPE:	Remington	PRIMER TYPE	Rem 2 1/2
CASE HOLDS:	21.8 Gr. WATER	BARREL Length/Make	8.2" Douglas
		BARREL Twist	1-20"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
SR7625	6.1 * MAX.	680	48%
	5.6	600	44%
	5.1	520	40%
A-No.5	7.2 * MAX.	730	35%
	6.7	650	32%
	6.2	570	30%
Blue Dot Most Accurate Powder Tested	9.0 * MAX.	758	53%
	8.5	693	50%
	8.0	628	47%
Unique	7.5 MAX.	823	56%
	7.0 *	776	53%
	6.5	729	49%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the

condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load