


CARTRIDGE

458 Lott - 500 grain

Version 8.0

Nosler®

UP FRONT

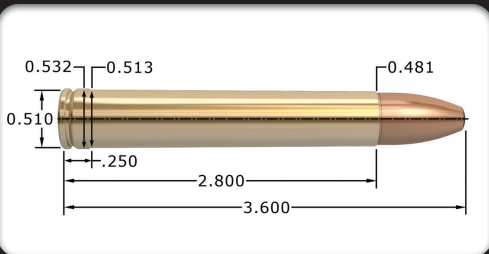

458 Lott - 500 grain

458 Cal. (.458")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.600"

TESTED O.A.C.L.

B.C.

S.D.

Partition®	500gr. PPT	3.590"	0.389	0.341
Solid™	500gr. Solid	3.590"	0.246	0.341

CASE TYPE:	Norma	PRIMER TYPE	WLRM
CASE HOLDS:	75.8 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Varget	77.0 * MAX.	2142	** 110%
	75.0	2108	** 107%
	73.0	2075	** 104%
H4895	74.0 MAX.	2149	** 107%
	72.0 *	2098	** 104%
	70.0	2075	** 101%
IMR 4895 Most Accurate Powder Tested	76.0 MAX.	2153	** 110%
	74.0 *	2120	** 107%
	72.0	2105	** 104%
TAC	74.0 * MAX.	2159	100%
	72.0	2097	97%
	70.0	2047	94%
RL15	79.0 MAX.	2207	** 109%
	77.0	2152	** 106%
	75.0 *	2105	** 103%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load