


CARTRIDGE

22-250 Remington - 50/52/53 grain

Version 8.3

Nosler®

UP FRONT

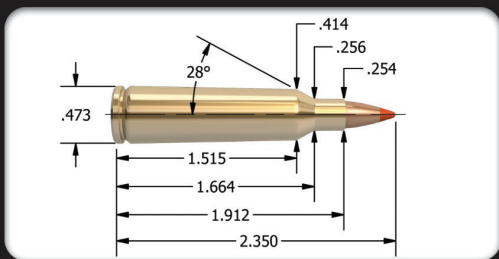

22-250 Remington - 50/52/53 grain 22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.350" TESTED O.A.C.L. B.C. S.D.

Ballistic Tip®	50gr. Spitzer	2.350"	0.238	0.142
CT®Ballistic Silvertip®	50gr. Spitzer	2.350"	0.238	0.142
Nosler®	50gr. FBHP	2.350"	0.192	0.142
Nosler®	50gr. FBSP	2.350"	0.195	0.142
Custom Competition®	52gr. HPBT	2.350"	0.220	0.148
Varmageddon®	53gr FB Tipped	2.350"	0.303	0.152

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	42.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4064	34.5 MAX.	3690	89%
	32.5	3470	84%
	30.5 *	3250	79%
Viht N140	36.0 * MAX.	3736	98%
	34.0	3500	93%
	32.0	3265	87%
A-2230	35.5 MAX.	3740	85%
	33.5	3500	80%
	31.5 *	3260	75%
Varget	36.0 * MAX.	3794	91%
	34.0	3604	86%
	32.0	3415	81%
IMR 4350	40.0 MAX.	3800	99%
	38.0	3590	94%
	36.0 *	3380	89%
IMR 4895	34.0 * MAX.	3802	88%
	32.0	3577	83%
	30.0	3352	77%
Varmint	37.5 MAX.	3805	89%
	35.5	3603	84%
	33.5 *	3421	79%
Big Game	40.5 MAX.	3849	100%
	38.5	3729	95%
	36.5 *	3528	90%
H380 Most Accurate Powder Tested	41.0 MAX.	3897	** 101%
	39.0	3742	96%
	37.0 *	3547	91%
CFE 223	40.0 MAX.	3975	95%
	38.0	3762	90%
	36.0 *	3573	85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested
 ** = Compressed load