


# CARTRIDGE

## 6.5 Creedmoor - 90 grain

Version 8.0

# Nosler®

## UP FRONT

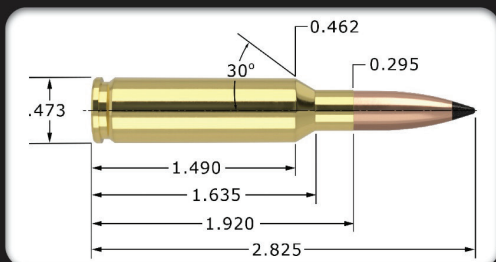

## 6.5 Creedmoor - 90 grain

## 6.5mm (.264")

**MAXIMUM S.A.A.M.I. O.A.C.L. 2.825"**

**TESTED O.A.C.L.**

**B.C.**

**S.D.**

Varmageddon®	90gr. FB Tipped	2.720"	0.350	0.184
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	49.2 Gr. WATER	BARREL Length/Make	24" Pac-Nor	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.	MAX.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 8208 XBR</b>	41.0	MAX.	3283	92%
	39.0 *		3091	87%
	37.0		2900	83%
<b>Varget</b>	43.0	MAX.	3305	94%
	41.0 *		3170	90%
	39.0		3035	86%
<b>CFE223</b>	47.5	MAX.	3404	97%
	45.5		3235	92%
	43.5 *		3066	88%
<b>W748</b> Most Accurate Powder Tested	44.5 *	MAX.	3332	94%
	42.5		3164	90%
	40.5		2997	86%
<b>A-2520</b>	41.5	MAX.	3247	87%
	39.5 *		3104	83%
	37.5		2961	79%
<b>IMR 4320</b>	42.5	MAX.	3229	94%
	40.5 *		3066	89%
	38.5		2903	85%
<b>RL15</b>	43.0	MAX.	3315	91%
	41.0 *		3163	87%
	39.0		3011	83%
<b>Big Game</b>	48.0 *		3384	** 103%
	46.0		3251	98%
	44.0		3118	94%
<b>Viht N540</b>	43.5 *	MAX.	3303	98%
	41.5		3135	94%
	39.5		2968	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.™

\* = Most accurate load tested

\*\* = Compressed load