


# CARTRIDGE

22-250 Remington - 55 grain

Version 8.0

# Nosler®

UP FRONT

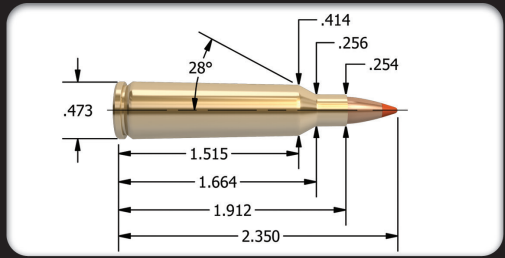

22-250 Remington - 55 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.350"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	55gr. Spitzer	2.350"	0.267	0.157
CT® Ballistic Silvertip®	55gr. Spitzer	2.350"	0.267	0.157
Nosler®	55gr. FBSP	2.350"	0.218	0.157
Varmageddon®	55gr. FBHP	2.350"	0.210	0.157
Varmageddon®	55gr. FB Tipped	2.350"	0.255	0.157

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	42.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Varmint</b>	36.0 * MAX.	3584	86%
	34.0	3420	81%
	32.0	3386	76%
<b>A-2460</b>	34.5 MAX.	3598	82%
	32.5	3383	77%
	30.5 *	3168	73%
<b>BLC2</b>	36.0 MAX.	3598	86%
	34.0 *	3410	81%
	32.0	3208	77%
<b>IMR 4895</b>	34.0 * MAX.	3602	88%
	32.0	3357	83%
	30.0	3112	78%
<b>IMR 4064</b>	34.5 MAX.	3603	89%
	32.5	3407	84%
	30.5 *	3211	79%
<b>IMR 4350</b>	39.0 * MAX.	3608	97%
	37.0	3423	92%
	35.0	3238	87%
<b>Varget</b>	35.0 MAX.	3635	89%
	33.0	3454	84%
	31.0 *	3273	79%
<b>IMR 4320</b>	35.5 * MAX.	3690	90%
	33.5	3480	85%
	31.5	3270	80%
<b>Big Game</b> Most Accurate Powder Tested	39.5 MAX.	3724	98%
	37.5 *	3568	93%
	35.5	3411	88%
<b>H380</b>	39.5 * MAX.	3736	98%
	37.5	3591	93%
	35.5	3381	88%
<b>CFE 223</b>	39.0 MAX.	3803	93%
	37.0	3604	88%
	35.0 *	3408	83%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested

\*\* = Compressed load