


CARTRIDGE

22-250 Remington - 77/80 grain (Fast Twist)

Version 8.0

Nosler[®]

UP FRONT

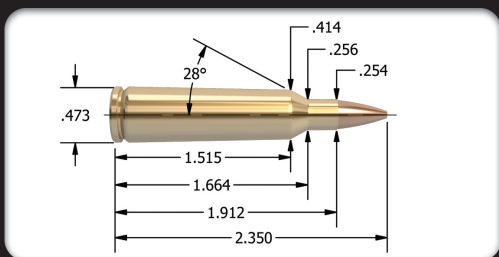

22-250 Remington - 77/80 grain (Fast Twist) 22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.350"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition [®]	77gr. HPBT	2.600"	0.340	0.219
Custom Competition [®]	80gr. HPBT	2.600"	0.415	0.228
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	42.1 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N160 Most Accurate Powder Tested	35.0 MAX.	2979	92%
	33.0	2845	87%
	31.0 *	2740	82%
H4831SC	38.0 MAX.	3083	94%
	36.0	2902	89%
	34.0 *	2750	84%
IMR 4350	36.0 MAX.	3106	90%
	34.0	2949	85%
	32.0 *	2782	80%
RL22	38.0 MAX.	3128	98%
	36.0	2946	93%
	34.0 *	2779	88%
H4350	36.0 MAX.	3131	90%
	34.0	3001	85%
	32.0 *	2836	80%
IMR 4831	37.0 * MAX.	3137	93%
	35.0	2925	88%
	33.0	2790	83%
H414	35.5 MAX.	3143	88%
	33.5 *	2963	83%
	31.5	2819	78%
W760	36.0 MAX.	3167	90%
	34.0 *	3003	85%
	32.0	2858	80%
RL19	38.0 MAX.	3187	98%
	36.0 *	2991	93%
	34.0	2774	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load