


CARTRIDGE

257 Roberts - 115 grain

Version 8.0

Nosler

UP FRONT

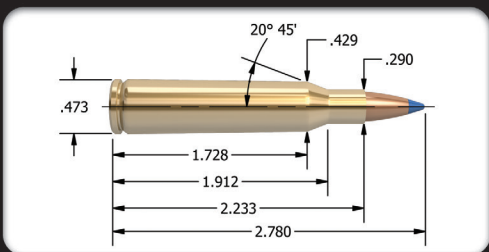

257 Roberts - 115 grain

25 Cal. (.257")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.780"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	115gr. Spitzer	2.750"	0.453	0.249
CT® Ballistic Silvertip®	115gr. Spitzer	2.750"	0.453	0.249
Partition®	115gr. Spitzer	2.750"	0.389	0.249

CASE TYPE:	Winchester	PRIMER TYPE	CCI 200
CASE HOLDS:	51.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 3031	33.5 * MAX.	2626	73%
	31.5	2511	69%
	29.5	2397	65%
IMR 4320	34.5 * MAX.	2710	72%
	32.5	2532	68%
	30.5	2354	64%
H4895	35.0 MAX.	2725	75%
	33.0	2593	70%
	31.0 *	2463	66%
Big Game	40.5 MAX.	2740	83%
	38.5	2638	79%
	36.5 *	2542	74%
IMR 4064	35.0 * MAX.	2785	75%
	33.0	2654	70%
	31.0	2523	66%
IMR 4350 Most Accurate Powder Tested	40.0 * MAX.	2806	82%
	38.0	2667	78%
	36.0	2527	74%
IMR 4895	35.0 * MAX.	2807	75%
	33.0	2669	70%
	31.0	2530	66%
W760	40.0 MAX.	2809	81%
	38.0	2686	77%
	36.0 *	2563	73%
H380	38.0 MAX.	2816	78%
	36.0	2714	73%
	34.0 *	2612	69%
IMR 4831	42.5 MAX.	2827	88%
	40.5	2703	83%
	38.5 *	2579	79%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load