


# CARTRIDGE

257 Roberts - 85 grain

Version 8.0

# Nosler

UP FRONT

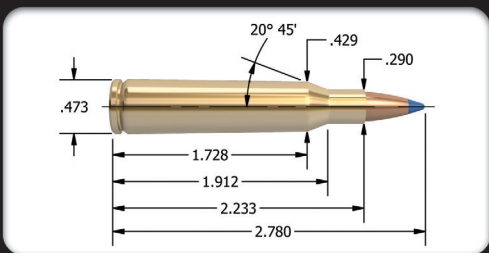

257 Roberts - 85 grain

25 Cal. (.257")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.780"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	85gr. Spitzer	2.750	0.329	0.183
CT® Ballistic Silvertip®	85gr. Spitzer	2.750	0.329	0.183

CASE TYPE:	Winchester	PRIMER TYPE	CCI 200
CASE HOLDS:	53.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>A-2520</b>	38.5 * MAX.	3090	74%
	36.5	2960	70%
	34.5	2830	66%
<b>Varget</b>	41.0 MAX.	3226	83%
	39.0	3133	79%
	37.0 *	3015	75%
<b>H380</b>	45.5 MAX.	3258	89%
	43.5	3143	85%
	41.5 *	3028	82%
<b>BL-C2</b>	43.0 * MAX.	3270	81%
	41.0	3150	78%
	39.0	3030	74%
<b>IMR 4350</b>	47.5 MAX.	3272	94%
	45.5	3087	90%
	43.5 *	2902	86%
<b>Big Game</b>	45.5 MAX.	3280	89%
	43.5 *	3165	85%
	41.5	3046	82%
<b>IMR 4895</b>	42.0 * MAX.	3352	86%
	40.0	3197	82%
	38.0	3042	78%
<b>IMR 4064</b>	43.5 * MAX.	3360	89%
	41.5	3210	85%
	39.5	3060	81%
<b>Viht N160</b>	50.5 * MAX.	3373	** 105%
	48.5	3232	** 101%
	46.5	3092	96%
<b>RL15</b> Most Accurate Powder Tested	43.5 MAX.	3381	88%
	41.5	3231	84%
	39.5 *	3082	80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load