


CARTRIDGE

270 Weatherby Magnum - 160 grain

Version 8.0

Nosler®

UP FRONT

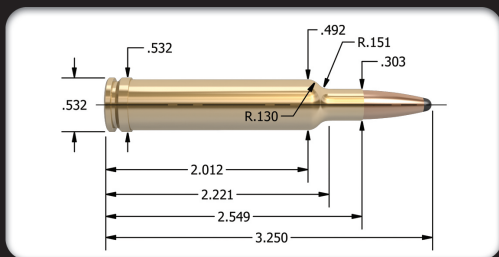

270 Weatherby Magnum - 160 grain 270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.250"

TESTED O.A.C.L.

B.C.

S.D.

Partition®	160gr. Semi Spitzer	3.230"	0.434	0.298
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215	
CASE HOLDS:	79.8 Gr. WATER	BARREL Length/Make	26" Lilja	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL22	64.5 * MAX.	2872	88%
	62.5	2798	85%
	60.5	2723	82%
IMR 4831	65.0 MAX.	2920	87%
	63.0	2840	84%
	61.0 *	2760	81%
H4831	67.5 MAX.	2970	88%
	65.5	2880	86%
	63.5 *	2790	83%
IMR 4350	63.0 MAX.	2980	84%
	61.0	2900	81%
	59.0 *	2820	78%
RL25 Most Accurate Powder Tested	71.0 MAX.	3029	97%
	69.0 *	2974	94%
	67.0	2867	91%
Magnum	76.0 MAX.	3041	97%
	74.0	2965	94%
	72.0 *	2891	92%
Retumbo	74.0 * MAX.	3047	98%
	72.0	2974	95%
	70.0	2900	92%
IMR 7828	70.0 * MAX.	3098	93%
	68.0	3019	91%
	66.0	2931	88%
Viht N560	69.0 MAX.	3110	96%
	67.0	3023	93%
	65.0 *	2932	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load