


CARTRIDGE

280 Ackley Improved - 120 grain

Version 8.0

Nosler®

UP FRONT

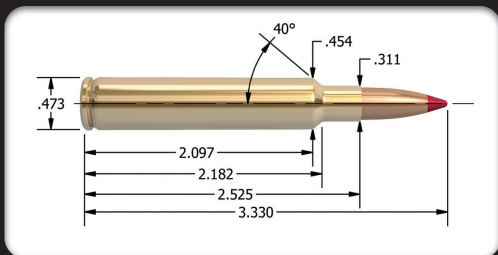

280 Ackley Improved - 120 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.330"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	120gr. Spitzer	3.330"	0.417	0.213
----------------	----------------	--------	-------	-------

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	68.0 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC Most Accurate Powder Tested	65.0 MAX.	3331	100%
	63.0	3227	97%
	61.0 *	3124	93%
W760	59.5 MAX.	3347	92%
	57.5	3245	89%
	55.5 *	3143	85%
RL19	63.0 MAX.	3365	** 101%
	61.0	3253	98%
	59.0 *	3140	94%
IMR 4350	60.5 MAX.	3366	94%
	58.5	3250	91%
	56.5 *	3135	88%
Viht N160	63.0 MAX.	3376	** 103%
	61.0	3268	100%
	59.0 *	3160	96%
H414	60.0 MAX.	3396	92%
	58.0	3294	89%
	56.0 *	3192	86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load